

SUBMITTAL DATA

ARX60HPJ1R32IA / ARX60HPJ1R32OA
60000 BTU/H Unitary Heat Pump Split System

Job Name

Purchaser

Submitted to

Unit Designation

Location

Date


Engineer

For

Schedule No.



ARX60HPJ1R32IA



ARX60HPJ1R32OA



WK-010WC1


GENERAL FEATURES

- AHRI Certificate:
- High Efficiency DC Inverter Technology
- 24VAC Thermostat Compatible
- Zero Lot Line Design
- New R32 Refrigerant
- WK-010WC1 Programmable Wired Controller Included
- Designed for New Construction or Replacement Market
- Low Ambient Cooling down to -15°C (5°F)
- Low Ambient Heating down to -30°C (-22°F)
- Coil (Outdoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Gold Colored Fin - 1500Hr Salt Spray Rating)
- Coil (Indoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Blue Colored Fin - 500Hr Salt Spray Rating)

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE			FEATURES & FUNCTIONS SUMMARY			
Outdoor Model		ARX60HPJ1R320A		Ultra Low Frequency Torque Control	Yes	
Indoor Model		ARX60HPJ1R321A		Power Factor Correction	Yes	
SYSTEM PERFORMANCE§			Electronic Expansion Valve (EEV)		Yes	
Cooling Capacity	Min - Max	Btu/h	34,214 - 61,600		Basepan With Electric Heater	Yes
	Rated Capacity @95°F	Btu/h	53,000		Compressor With Electric Heater	Yes
Heating Capacity	Min - Max	Btu/h	25,931 - 57,240		Fin Coating (Outdoor - Golden & Indoor - Blue)	Acrylic Resin
	Rated Capacity @47°F	Btu/h	54,000		Intelligent Defrosting	Yes
	Rated Capacity @17°F	Btu/h	45,000		Intelligent Preheating	Yes
	Rated Capacity @5°F	Btu/h	54,000		Low Voltage Startup	Yes
SEER2		18.5		Memory/Power Failure Recovery	Yes	
EER2		11.7		Self Diagnosis	Yes	
HSPF2		10.5		Low Ambient Cooling	Yes	
COP @5°F		2.10		24VAC Thermostat Compatible	Yes	
Cooling Temperature Range		°F	5 - 129		Indoor Fan Type	Centrifugal
Heating Temperature Range		°F	-22 - 75		Multi Fan Speeds	5 Speeds
Refrigerant Type		R32		Auxiliary Electrical Heater	Optional	
INDOOR UNIT		ARX60HPJ1R321A		A2L Leak Detection Sensor (Indoor)	Factory Installed	
Power Supply		VAC	208-230V / 1Ph / 60 Hz			
Sound Pressure Level		dB(A)	54			
Control Voltage		VAC	24			
MOCP		A	15			
MCA		A	7.7			
Electric Heater (Optional)		kW	5, 6, 9, 10, 12, 15, 20			
Air Flow		CFM	1500			
External Static Pressure (Up to)		In W.c.	1.0			
Dehumidification		pt/hr	9.38			
Drain Piping		in	Φ1×0.05			
External Dimensions (W x D x H)		in	24-13/16 × 21-1/4 × 52			
Package Dimension (L x W x H)		in	27-1/4 × 26 × 54-3/16			
Net Weight		lbs	199.5			
Gross Weight		lbs	218.0			
OUTDOOR UNIT		ARX60HPJ1R320A				
Power Supply		VAC	208-230V / 1Ph / 60 Hz			
Sound Pressure Level		dB(A)	63			
Control Voltage		VAC	24			
Rated Current Cooling		A	30			
Rated Current Heating		A	32			
MOCP		A	45			
MCA		A	39.9			
Compressor Type		GREE G20 / Double Cylinder / 2 - Stage Inverter				
External Dimensions (W x H x D)		in	35-7/16 × 49-5/8 × 13-3/8			
Package Dimension (W x H x D)		in	40-11/16 × 55-3/16 × 17-3/8			
Net Weight		lbs	241.4			
Gross Weight		lbs	263.5			
Refrigerant Charge - R32		oz	162.3			
Additional Charge		oz/ft	0.215			
REFRIGERANT PIPING						
Line Set Size (Liquid - Gas) - Flared Connections		in	3/8 - 3/4			
Pre-Charge Length		ft	31			
Pipe Length (Min - Max)		ft	10 - 98			
Max. Pipe Elevation		ft	49			

FAN PERFORMANCE

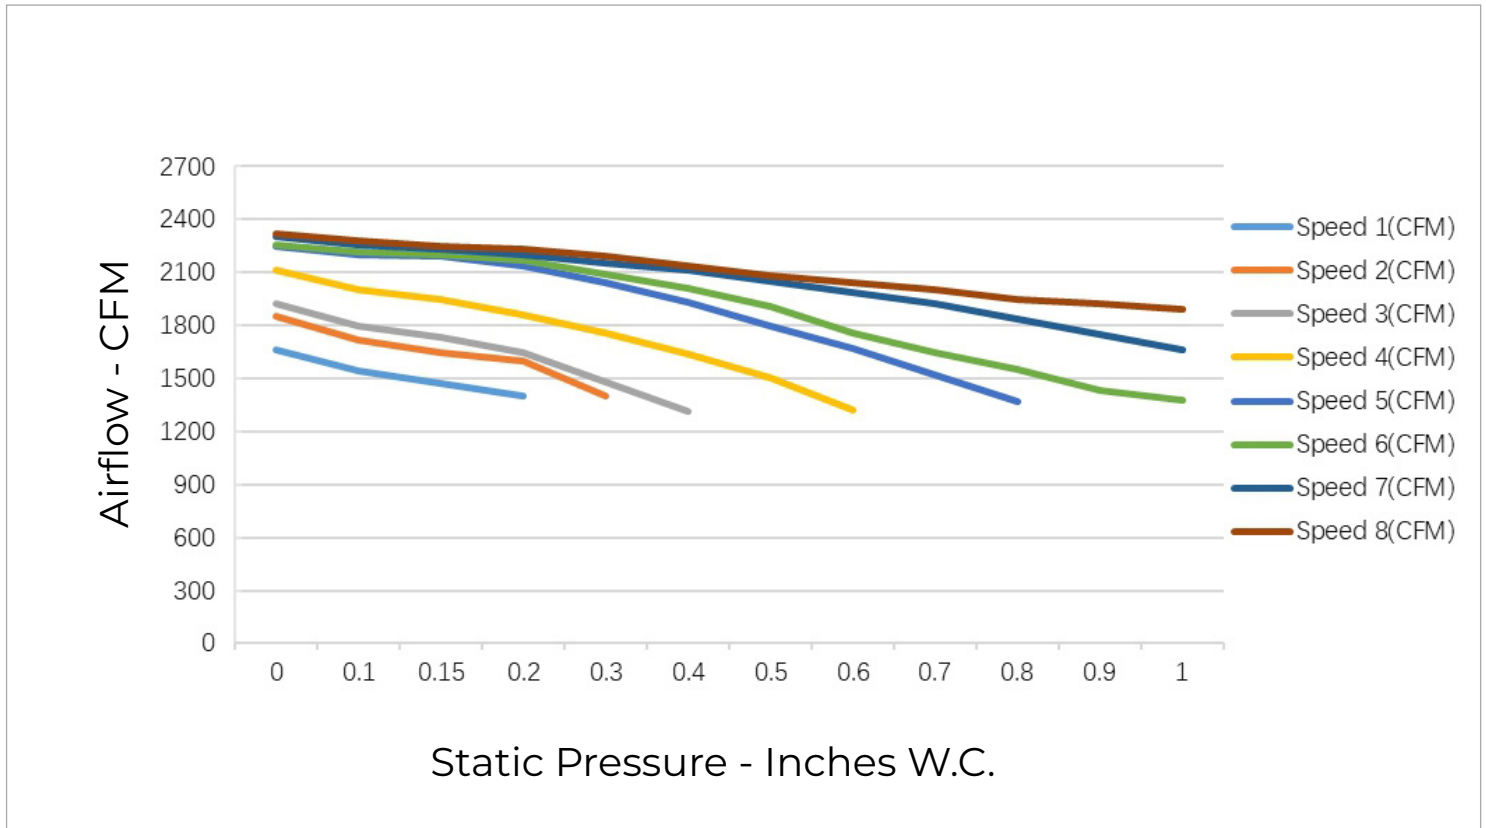

NOTE:


1. Above chart CFM ratings are based on dry coil with factory filter installed.
2. For wet coil CFM ratings, multiply the CFM by 0.96 correction factor.

DIMENSIONS

INDOOR UNIT

Unit: inch




ARX60HPJ1R321A	
DIMENSIONS	
A	11-5/8
B	20
H	52
W	24-13/16
D	21-1/4

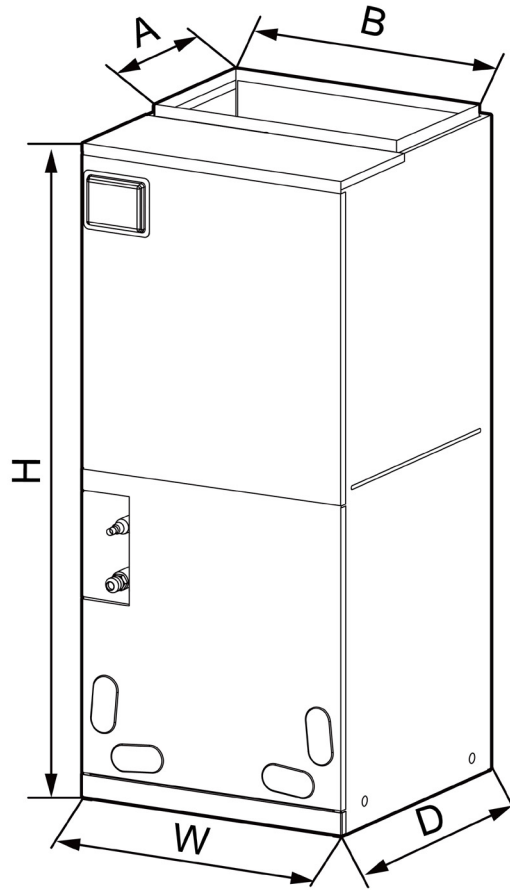


OUTDOOR UNIT

Unit: inch

ARX60HPJ1R320A	
DIMENSIONS	
A	35-7/16
B	16-1/4
C	49-5/8
D	22-7/16
E	14-7/8
G	13-3/8

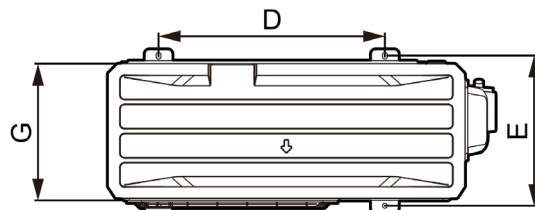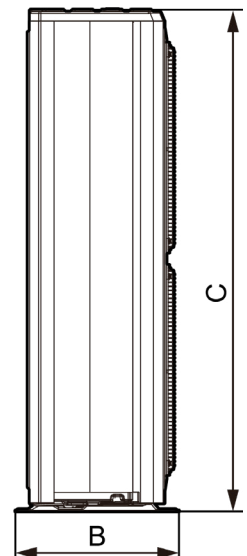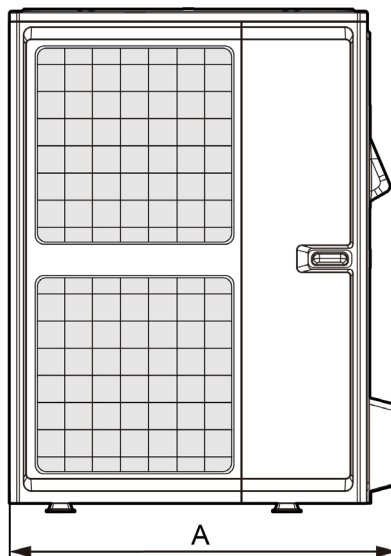

ACCESSORY HEATER AND GENERAL INFORMATION

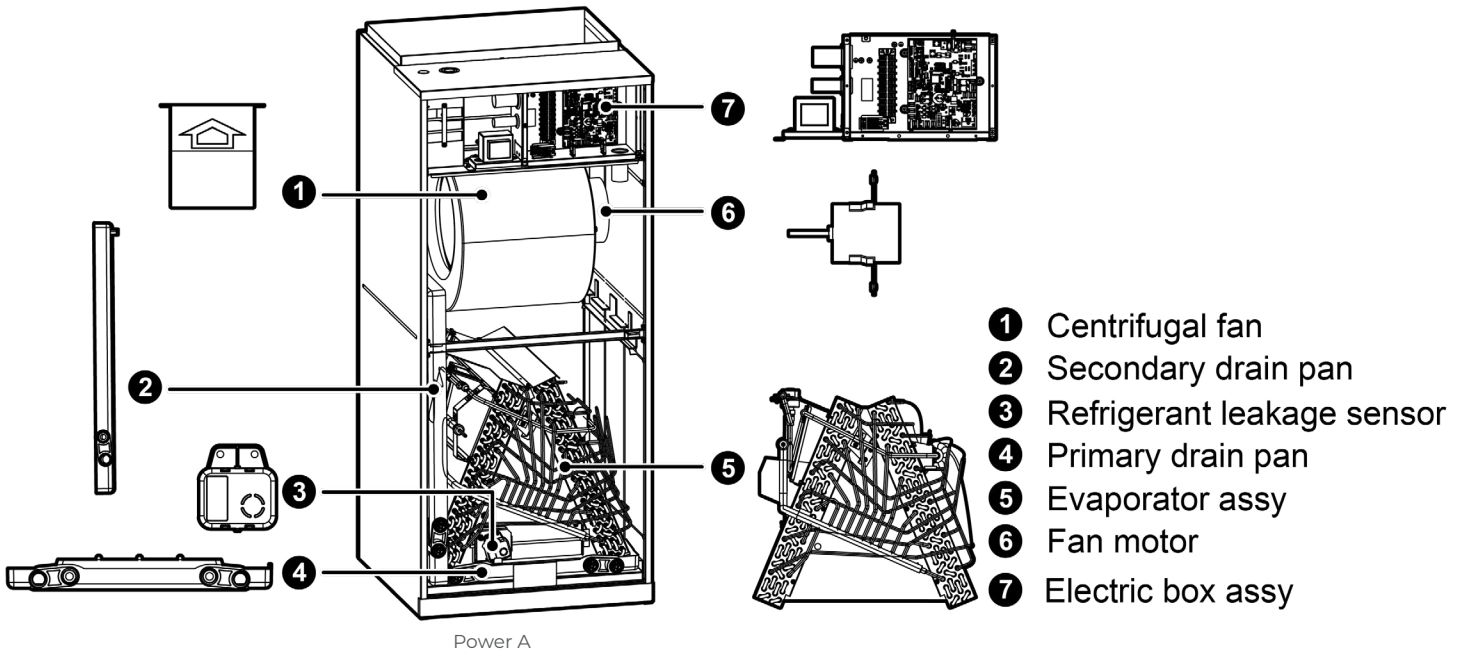

- 1 Centrifugal fan
- 2 Secondary drain pan
- 3 Refrigerant leakage sensor
- 4 Primary drain pan
- 5 Evaporator assy
- 6 Fan motor
- 7 Electric box assy

MODEL	Heat Kit Model	Part Number	Electric Heat (kW)		Min. Circuit Ampacity (A)		Max Fuse or Breaker (A)	
			208V	230V	208V	230V	208V	230V
ARX60HPJIR32IA	320004060249	FLEXA2LHTR05KWD	3.74	4.6	28	29.9	30	35
	320004060250	FLEXA2LHTR10KWD	7.49	9.2	50	55	60	60
	320004060251	FLEXA2LHTR15KWD	11.23	13.8	74	82	80	90
	320004060252	FLEXA2LHTR20KWD	14.98	18.4	98	108	100	110



MODEL	Heat Kit Model	Part Number	Electric Heat (kW)		Min. Circuit Ampacity (A)		Max Fuse or Breaker (A)				
			208V	230V	208V	230V	208V	230V			
ARX60HPJIR32IA	One Mains Supply										
	320004060223	FLEXA2LHTR06	3.74	4.6	31	33	35	35			
	Two Mains Supply										
						Power A	Power B	Power A	Power B		
	320004060224	FLEXA2LHTR09	6.03	7.36	35	13.8	37.5	15	40	15	40
320004060225	FLEXA2LHTR12	7.49	9.2	35	27.5	37.5	30	40	30	40	35

CLEARANCES


INDOOR UNIT

Minimum clearance

FRONT > 24

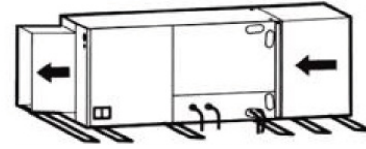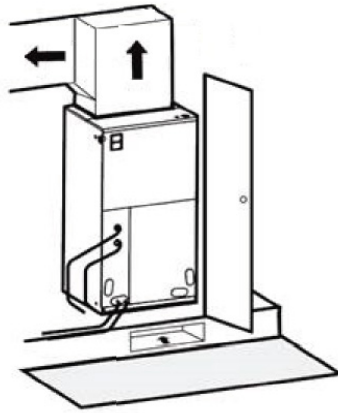

Horizontal Left Configuration - No Modification Needed

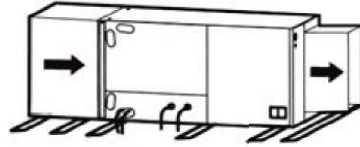

Horizontal Right Configuration - Must Relocate Drain Pan

NOTE:

Allow a minimum of 24" in front of the unit for service clearance. When installing in an area directly over a finished ceiling (such as an attic), an emergency drain pan is required directly under the unit. **See local and state codes for requirements.** When installing this unit in an area that may become wet, elevate the unit with a sturdy, non-porous material. In installations that may lead to physical damage (i.e. a garage) it is advised to install a protective barrier to prevent such damage. This air handler is designed for a complete supply and return ductwork system.


OUTDOOR UNIT

Minimum clearance

NOTE:
Install the Outdoor Unit **2 Inches**
Above the Expected Snow Line

1. When one outdoor unit is to be installed.


A - E	H_b H_d H		(in)				
			a	b	c	d	e
B	-	-	-	≥ 4	-	-	-
A, B, C	-	-	≥ 12	≥ 4	≥ 4	-	-
B, E	-	-	-	≥ 4	-	-	≥ 40
A, B, C, E	-	-	≥ 12	≥ 6	≥ 6	-	≥ 40
D	-	-	-	-	-	≥ 40	-
D, E	-	-	-	-	-	≥ 40	≥ 40
B, D	$H_b < H_d$	$H_d < H$	-	≥ 4	-	≥ 40	-
	$H_b > H_d$	$H_d > H$	-	≥ 4	-	≥ 40	-
B, D, E	-	$H_b \leq 1/2H$	-	≥ 10	-	≥ 80	≥ 40
	$H_b < H_d$	$1/2H < H_b \leq H$	-	≥ 10	-	≥ 80	≥ 40
	-	$H_b > H$	Prohibited				
	$H_b > H_d$	$H_d \leq 1/2H$	-	≥ 4	-	≥ 80	≥ 40
	$H_b > H_d$	$1/2H < H_d \leq H$	-	≥ 8	-	≥ 80	≥ 40
-	$H_d > H$	Prohibited					

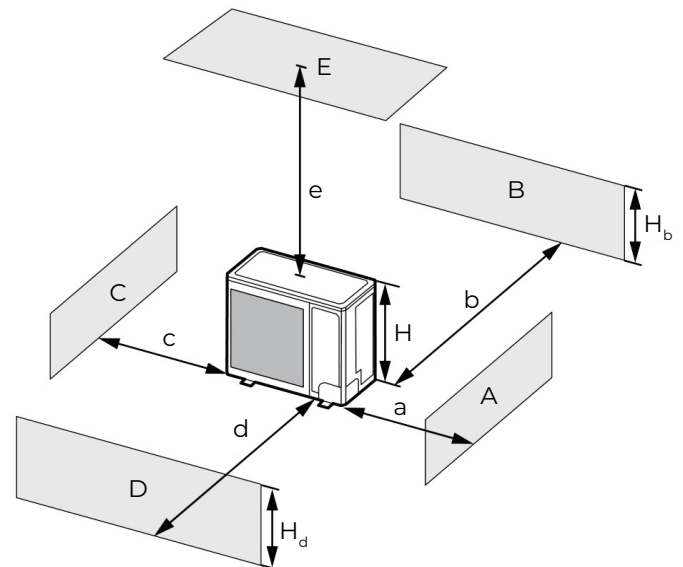

CLEARANCES


2. When two or more outdoor units are to be installed side by side.

A - E	H_b H_d H		(in)				
			a	b	c	d	e
A, B, C	-	-	≥ 12	≥ 12	≥ 40	-	-
A, B, C, E	-	-	≥ 12	≥ 12	≥ 40	-	≥ 40
D	-	-	-	-	-	≥ 80	-
D, E	-	-	-	-	-	≥ 80	≥ 40
B, D	$H_b < H_d$	$H_d > H$	-	≥ 12	-	≥ 80	-
	$H_b > H_d$	$1/2H < H_d \leq H$	-	≥ 10	-	≥ 80	-
B, D, E	$H_b > H_d$	$H_b \leq 1/2H$	-	≥ 12	-	≥ 80	≥ 40
		$1/2H < H_b \leq H$	-	≥ 12	-	≥ 100	≥ 40
	$H_b < H_d$	$H_b > H$	Prohibited				
		$H_d \leq 1/2H$	-	≥ 10	-	≥ 100	≥ 40
$H_b > H_d$	$1/2H < H_d \leq H$	-	≥ 12	-	≥ 100	≥ 40	
	$H_d > H$	Prohibited					

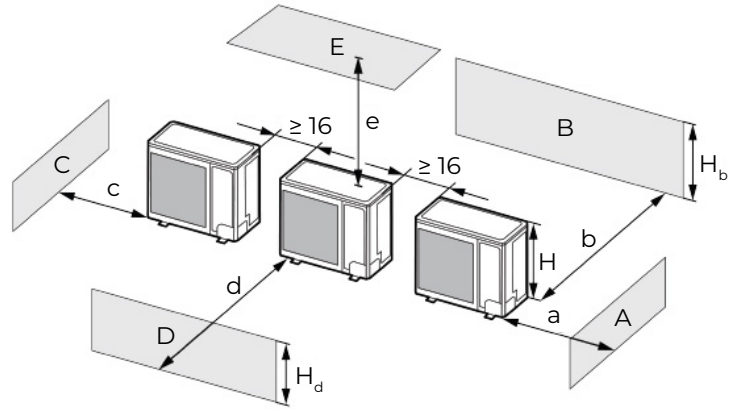


3. When outdoor units are installed in rows.

H_b H_d	(in)
$H_b \leq 1/2H$	$b \leq 10$
$1/2H < H_b \leq H$	$b \leq 12$
$H_b > H_d$	Prohibited

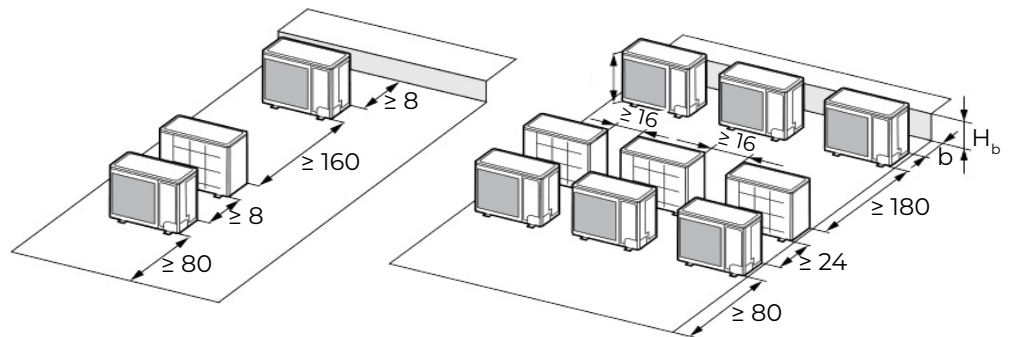

4. When outdoor units are installed one above another.

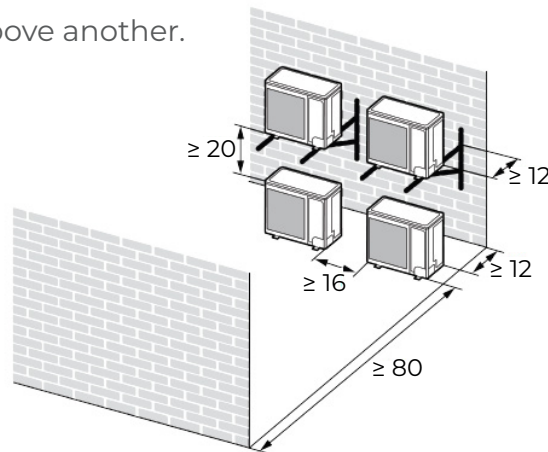

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.