

SUBMITTAL DATA

MUL18HPJ132OA
18000 BTU/H Multi Zone+ Heat Pump System

Job Name

Purchaser

Submitted to

Unit Designation

Location

Date

Engineer

For

Schedule No.



GENERAL FEATURES

- AHRI Certificate: [215424768 \(Non-Ducted\)](#)
- [215424773 \(Ducted\)](#)
- [215424778 \(Mixed\)](#)
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Auto Restart on Power Outages
- Multi-point Diagnostics
- Wi-Fi Included (Factory Installed)
- Low Ambient Cooling down to -22°F (Range -22°F to 118°F)
- Low Ambient Heating down to -22°F (Range -22°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

MULTI-ZONE COMPATIBILITY CHART

WALL MOUNT OPTIONS

	MULTI ZONE				
	MUL18HPJ132OA	MUL24HPJ132OA	MUL30HPJ132OA	MUL36HPJ132OA	MUL42HPJ132OA
BRISA					
System Model no.					
BRS09HPJ132IA	•	•	•	•	•
BRS12HPJ132IA	•	•	•	•	•
BRS18HPJ132IA		•	•	•	•
BRS24HPJ132IA			•	•	•
BRS30HPJ132IA					
BRS36HPJ132IA					
KULA					
System Model no.					
KUL09HPJ132IA	•	•	•	•	•
KUL12HPJ132IA	•	•	•	•	•
KUL18HPJ132IA		•	•	•	•
KUL24HPJ132IA			•	•	•

ADDITIONAL INDOOR UNIT OPTIONS

	MULTI ZONE				
	MUL18HPJ132OA	MUL24HPJ132OA	MUL30HPJ132OA	MUL36HPJ132OA	MUL42HPJ132OA
ONE WAY CASSETTE					
System Model no.					
OWC09HPJ132IA	•	•	•	•	•
OWC12HPJ132IA	•	•	•	•	•
OWC18HPJ132IA		•	•	•	•
OWC20HPJ132IA			•	•	•
CEILING CASSETTE					
System Model no.					
CAS09HPJ132IA	•	•	•	•	•
CAS12HPJ132IA	•	•	•	•	•
CAS18HPJ132IA		•	•	•	•
CAS24HPJ132IA			•	•	•
SLIM DUCT					
System Model no.					
DUC09HPJ132IA	•	•	•	•	•
DUC12HPJ132IA	•	•	•	•	•
DUC18HPJ132IA		•	•	•	•
DUC24HPJ132IA			•	•	•
FLOOR / CEILING					
System Model no.					
FLR09HPJ132IA	•	•	•	•	•
FLR12HPJ132IA	•	•	•	•	•
FLR18HPJ132IA		•	•	•	•
FLR24HPJ132IA			•	•	•
MINI-CONSOLE					
System Model no.					
CON09HPJ132IA	•	•	•	•	•
CON12HPJ132IA	•	•	•	•	•
CON18HPJ132IA		•	•	•	•

NOTE: R32 Indoor units are only compatible with R32 Outdoor units. Keep in mind, line set is always sized by the indoor unit valve diameter.

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE			HEAT PUMP	REFRIGERANT PIPING		
Outdoor Model			MUL18HPJ132OA	Refrigerant Charge - R32	oz	31.8
Number of Zones			2	Cmpressor Type		G-20 / Double Cylinder / 1 - STAGE INVERTER
SYSTEM PERFORMANCE (Non-Ducted Indoor Units)				Additional Charge	oz/ft	0.2
Cooling Capacity	Min - Max	Btu/h	5,434 - 23,495	Port Size (Liquid - Gas)	Port A (in)	1/4 - 3/8
	Capacity @95°F	Btu/h	18,000		Port B (in)	1/4 - 3/8
Heating Capacity	Min - Max	Btu/h	5,397 - 19,800		Port C (in)	
	Capacity @47°F	Btu/h	18,000		Port D (in)	
	Capacity @17°F	Btu/h	16,000		Port E (in)	
	Capacity Max @5°F	Btu/h	13,800	Pre-Charge Length	ft	33
SEER2			21	Pipe Length (Min - Max)	ft	10 - 131
EER2			12.0	Pipe Length to furthest Indoor Unit	ft	66
HSPF2			10.0	Max. Pipe Elevation	ft	49
COP @5°F			2.0	ELECTRICAL		
SYSTEM PERFORMANCE (Ducted Indoor Units)				Power Supply		208-230V / 1Ph / 60Hz
Cooling Capacity	Min - Max	Btu/h	5,434 - 23,495	Voltage Range (Min - Max)	VAC	187 - 253
	Capacity @95°F	Btu/h	18,000	Rated Current - Cooling	A	11
Heating Capacity	Min - Max	Btu/h	5,397 - 19,800	Rated Current - Heating	A	11
	Capacity @47°F	Btu/h	18,000	MCA	A	18.5
	Capacity @17°F	Btu/h	15,000	MOCP	A	20
	Capacity Max @5°F	Btu/h	13,600	Suggested Breaker Size	A	20
SEER2			18.0	Main Power Wire Size	AWG	Per Local Code
EER2			11.7	Interconnecting Wire Size	AWG	14 / 4
HSPF2			8.1	FEATURES & FUNCTIONS SUMMARY		
COP @5°F			1.86	Inverter Type	G20	
SYSTEM PERFORMANCE (Mixed Ducted and Non-Ducted Indoor Units)				Ultra Low Frequency Torque Control	Yes	
Cooling Capacity	Min - Max	Btu/h	5,434 - 23,495	Compressor Type - Inverter	Yes	
	Capacity @95°F	Btu/h	18,000	Basepan With Electric Heater	High Efficiency Rotary	
Heating Capacity	Min - Max	Btu/h	5,397 - 19,800	Indoor & Outdoor Fin Coating (Blue Fin)	Yes	
	Capacity @47°F	Btu/h	18,000	Intelligent Defrosting	Yes	
	Capacity @17°F	Btu/h	15,400	Intelligent Preheating	Yes	
	Capacity Max @5°F	Btu/h	13,700	Low Voltage Startup	Yes	
SEER2			19.0	Memory/Power Failure Recovery	Yes	
EER2			11.8	Self Diagnosis	Yes	
HSPF2			9.0			
COP @5°F			1.80			
OUTDOOR UNIT			MUL18HPJ132OA			
Cooling Temperature Range		°F	-22 - 118			
Heating Temperature Range		°F	-22 - 75			
Refrigerant Type			R32			
Cmpressor Type			G-20 / Double Cylinder / 1 - STAGE INVERTER			
Sound Pressure Level		dB(A)	54			
External Dimensions (W x H x D)		in	32-23/64 × 21-42/64 × 13-55/64			
Package Dimension (W x H x D)		in	34-21/64 × 24-13/32 × 15-43/64			
Net Weight		lbs	75.0			
Gross Weight		lbs	81.6			

ALLOWABLE COMBINATIONS CAPACITIES

MODEL NUMBER	POSSIBLE COMBINATIONS*	COOLING CAPACITY (Btu/h)					HEATING CAPACITY (Btu/h)				
		ZONE1	ZONE2	ZONE3	ZONE4	ZONE5	ZONE1	ZONE2	ZONE3	ZONE4	ZONE5
MUL18HPJ132OA	5K + 5K	5.000	5.000				6.000	6.000			
MUL18HPJ132OA	7K + 7K	7.000	7.000				8.000	8.000			
MUL18HPJ132OA	5K + 7K	5.000	7.000				6.000	8.000			
MUL18HPJ132OA	9K + 9K	8.500	8.500				9.000	9.000			
MUL18HPJ132OA	9K + 12K	7.286	9.714				7.714	10.286			
MUL18HPJ132OA	12K + 12K	8.500	8.500				9.000	9.000			

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance


*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

DIMENSIONS

OUTDOOR UNIT

Unit: inch



MUL18HPJ1320A	
DIMENSIONS	
A	29-21/64
B	32-3/8
C	21-11/16
D	11-13/16
E	13-7/8
F	20-5/32
G	13-5/64

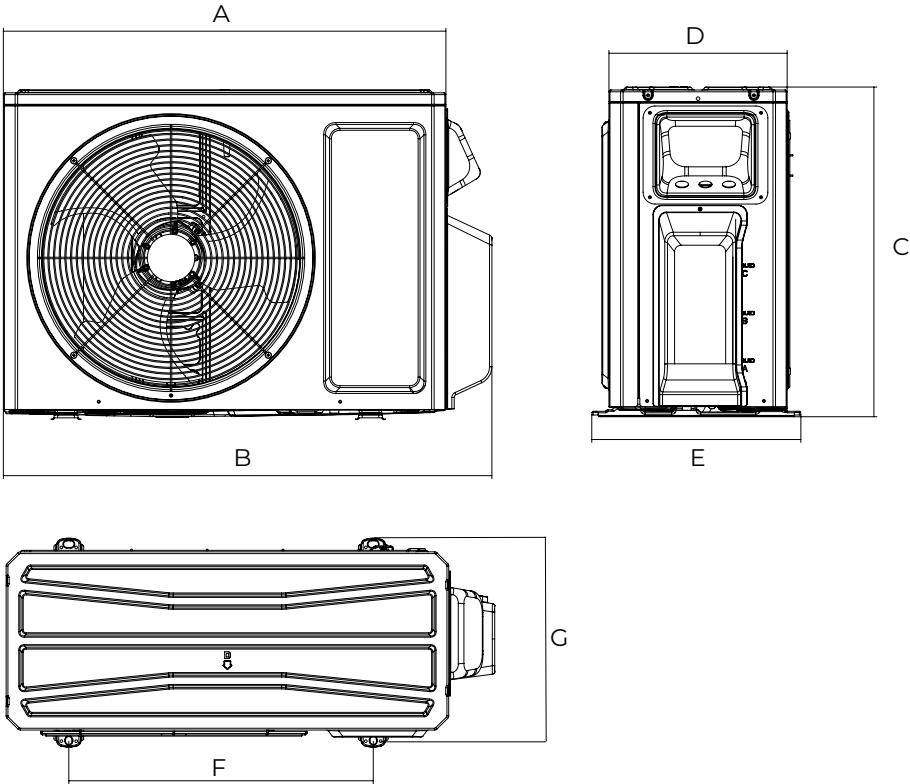

CLEARANCES

OUTDOOR UNIT

Minimum clearance

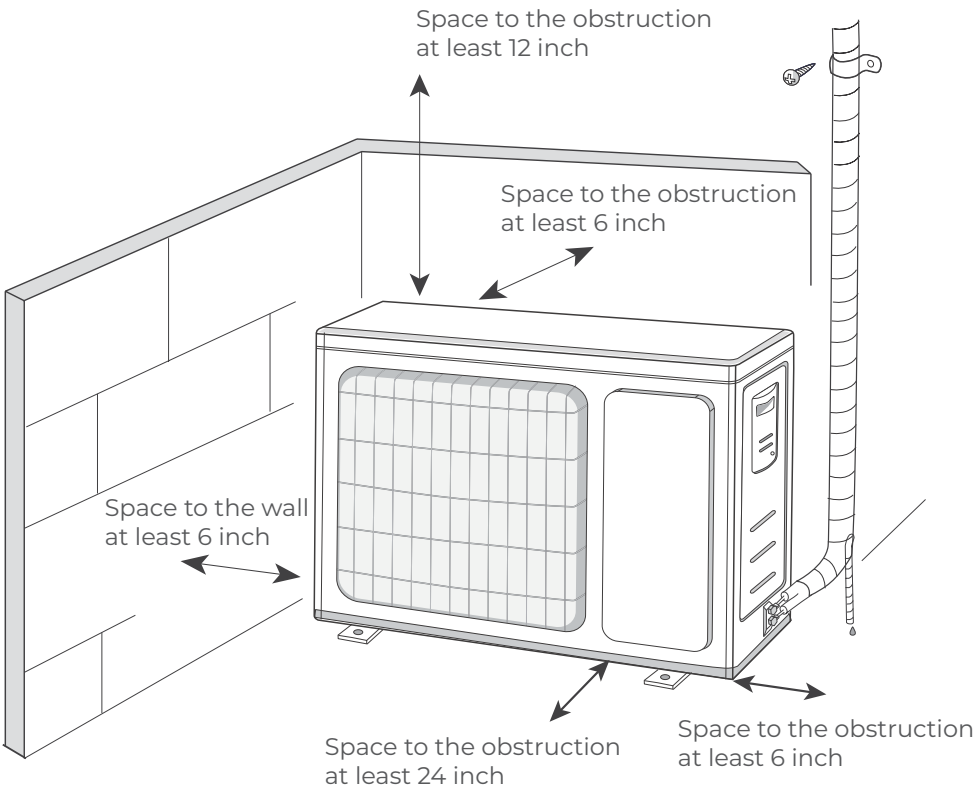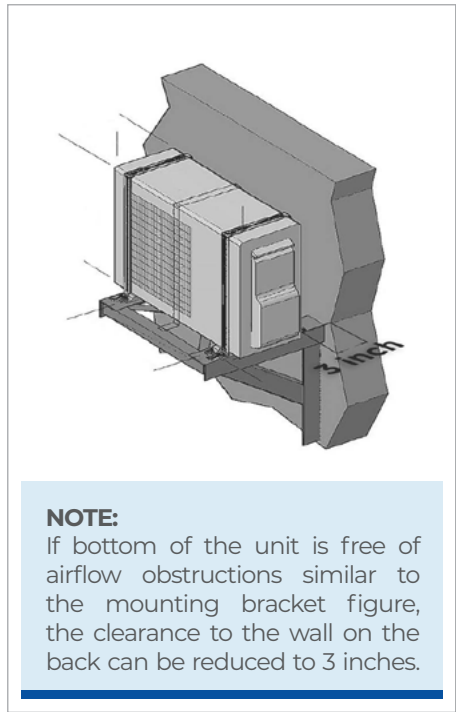

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

BOREALHEATPUMP.COM