

SUBMITTAL DATA

MUL36HPJ132OA
36000 BTU/H Multi Zone+ Heat Pump System

Job Name

Purchaser

Submmited to

Unit Designation

Location

Date

Engineer

For

Schedule No.



GENERAL FEATURES

- AHRI Certificate: [215424771 \(Non-Ducted\)](#) • Multi-point Diagnostics
- [215424776 \(Ducted\)](#) • Wi-Fi Included (Factory Installed)
- [215424781 \(Mixed\)](#) • Low Ambient Cooling down to -22°F (Range -22°F to 118°F)
- High Efficiency DC Inverter Technology • Low Ambient Heating down to -22°F (Range -22°F to 75°F)
- Compact and Quiet Design • Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Auto Restart on Power Outages • Blue Colored Fin - 500 Hrs Salt Spray Tested

MULTI-ZONE COMPATIBILITY CHART

WALL MOUNT OPTIONS

	MULTI ZONE				
	MUL18HPJ132OA	MUL24HPJ132OA	MUL30HPJ132OA	MUL36HPJ132OA	MUL42HPJ132OA
BRISA					
System Model no.					
BRS09HPJ132IA	•	•	•	•	•
BRS12HPJ132IA	•	•	•	•	•
BRS18HPJ132IA		•	•	•	•
BRS24HPJ132IA			•	•	•
BRS30HPJ132IA					
BRS36HPJ132IA					
KULA					
System Model no.					
KUL09HPJ132IA	•	•	•	•	•
KUL12HPJ132IA	•	•	•	•	•
KUL18HPJ132IA		•	•	•	•
KUL24HPJ132IA			•	•	•

ADDITIONAL INDOOR UNIT OPTIONS

	MULTI ZONE				
	MUL18HPJ132OA	MUL24HPJ132OA	MUL30HPJ132OA	MUL36HPJ132OA	MUL42HPJ132OA
ONE WAY CASSETTE					
System Model no.					
OWC09HPJ132IA	•	•	•	•	•
OWC12HPJ132IA	•	•	•	•	•
OWC18HPJ132IA		•	•	•	•
OWC20HPJ132IA			•	•	•
CEILING CASSETTE					
System Model no.					
CAS09HPJ132IA	•	•	•	•	•
CAS12HPJ132IA	•	•	•	•	•
CAS18HPJ132IA		•	•	•	•
CAS24HPJ132IA			•	•	•
SLIM DUCT					
System Model no.					
DUC09HPJ132IA	•	•	•	•	•
DUC12HPJ132IA	•	•	•	•	•
DUC18HPJ132IA		•	•	•	•
DUC24HPJ132IA			•	•	•
FLOOR / CEILING					
System Model no.					
FLR09HPJ132IA	•	•	•	•	•
FLR12HPJ132IA	•	•	•	•	•
FLR18HPJ132IA		•	•	•	•
FLR24HPJ132IA			•	•	•
MINI-CONSOLE					
System Model no.					
CON09HPJ132IA	•	•	•	•	•
CON12HPJ132IA	•	•	•	•	•
CON18HPJ132IA		•	•	•	•

NOTE: R32 Indoor units are only compatible with R32 Outdoor units. Keep in mind, line set is always sized by the indoor unit valve diameter.

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE			HEAT PUMP
Outdoor Model			MUL36HPJ132OA
Number of Zones			2 - 4
SYSTEM PERFORMANCE (Non-Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	10,275 - 46,989
	Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	13,506 - 39,600
	Capacity @47°F	Btu/h	36,000
	Capacity @17°F	Btu/h	36,000
	Capacity Max @5°F	Btu/h	36,000
SEER2			21
EER2			12.0
HSPF2			10.0
COP @5°F			2.10
SYSTEM PERFORMANCE (Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	10,275 - 46,989
	Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	13,506 - 39,600
	Capacity @47°F	Btu/h	36,000
	Capacity @17°F	Btu/h	36,000
	Capacity Max @5°F	Btu/h	33,000
SEER2			18.0
EER2			11.7
HSPF2			8.1
COP @5°F			1.90
SYSTEM PERFORMANCE (Mixed Ducted and Non-Ducted Indoor Units)			
Cooling Capacity	Min - Max	Btu/h	10,275 - 46,989
	Capacity @95°F	Btu/h	36,000
Heating Capacity	Min - Max	Btu/h	13,506 - 39,600
	Capacity @47°F	Btu/h	36,000
	Capacity @17°F	Btu/h	36,000
	Capacity Max @5°F	Btu/h	34,000
SEER2			19.0
EER2			11.8
HSPF2			9.0
COP @5°F			1.84
OUTDOOR UNIT			MUL36HPJ132OA
Cooling Temperature Range	°F	-22 - 118	
Heating Temperature Range	°F	-22 - 75	
Refrigerant Type			R32
Cmpressor Type			G-20 / Double Cylinder / 1 - STAGE INVERTER
Sound Pressure Level	dB(A)	63	
External Dimensions (W x H x D)	in	40-10/64 x 32-33/64 x 16-52/64	
Package Dimension (W x H x D)	in	43-1/32 x 34-27/32 x 19-9/16	
Net Weight	lbs	176.4	
Gross Weight	lbs	189.6	

REFRIGERANT PIPING		
Refrigerant Charge - R32	oz	95.24
Cmpressor Type		G-20 / Double Cylinder / 1 - STAGE INVERTER
Additional Charge	oz/ft	0.2
Port Size (Liquid - Gas)	Port A (in)	1/4 - 3/8
	Port B (in)	1/4 - 3/8
	Port C (in)	1/4 - 3/8
	Port D (in)	1/4 - 3/8
	Port E (in)	
Pre-Charge Length	ft	131
Pipe Length (Min - Max)	ft	10 - 263
Pipe Length to furthest Indoor Unit	ft	82
Max. Pipe Elevation	ft	82
ELECTRICAL		
Power Supply		208-230V / 1Ph / 60Hz
Voltage Range (Min - Max)	VAC	187 - 253
Rated Current - Cooling	A	21.7
Rated Current - Heating	A	22.6
MCA	A	29
MOCP	A	35
Suggested Breaker Size	A	30
Main Power Wire Size	AWG	Per Local Code
Interconnecting Wire Size	AWG	14 / 4
FEATURES & FUNCTIONS SUMMARY		
Inverter Type	G20	
Ultra Low Frequency Torque Control	Yes	
Compressor Type - Inverter	Yes	
Basepan With Electric Heater	High Efficiency Rotary	
Indoor & Outdoor Fin Coating (Blue Fin)	Yes	
Intelligent Defrosting	Yes	
Intelligent Preheating	Yes	
Low Voltage Startup	Yes	
Memory/Power Failure Recovery	Yes	
Self Diagnosis	Yes	

ALLOWABLE COMBINATIONS CAPACITIES

MODEL NUMBER	POSSIBLE COMBINATIONS*	COOLING CAPACITY (Btu/h)					HEATING CAPACITY (Btu/h)				
		ZONE1	ZONE2	ZONE3	ZONE4	ZONE5	ZONE1	ZONE2	ZONE3	ZONE4	ZONE5
MUL36HPJ132OA	7K+7K+7K	7,000	7,000	7,000			8,000	8,000	8,000		
MUL36HPJ132OA	5K+7K+7K	5,000	7,000	7,000			6,000	8,000	8,000		
MUL36HPJ132OA	5K+5K+5K+5K	5,000	5,000	5,000	5,000		6,000	6,000	6,000	6,000	
MUL36HPJ132OA	7K+7K+7K+7K	7,000	7,000	7,000	7,000		8,000	8,000	8,000	8,000	
MUL36HPJ132OA	5K+5K+5K+7K	5,000	5,000	5,000	7,000		6,000	6,000	6,000	8,000	
MUL36HPJ132OA	5K+5K+7K+7K	5,000	5,000	7,000	7,000		6,000	6,000	8,000	8,000	
MUL36HPJ132OA	5K+7K+7K+7K	5,000	7,000	7,000	7,000		6,000	8,000	8,000	8,000	
MUL36HPJ132OA	9K+9K	9,000	9,000				9,500	9,500			
MUL36HPJ132OA	9K+12K	9,000	12,000				9,429	12,571			
MUL36HPJ132OA	9K+18K	9,000	18,000				9,000	18,000			
MUL36HPJ132OA	9K+24K	9,000	24,000				9,000	24,000			
MUL36HPJ132OA	12K+12K	12,000	12,000				12,000	12,000			
MUL36HPJ132OA	12K+18K	12,000	18,000				12,000	18,000			
MUL36HPJ132OA	12K+24K	11,333	22,667				12,000	24,000			
MUL36HPJ132OA	18K+18K	17,000	17,000				18,000	18,000			
MUL36HPJ132OA	18K+24K	14,571	19,429				15,429	20,571			
MUL36HPJ132OA	21K+24K	15,867	18,133				16,800	19,200			
MUL36HPJ132OA	24K+24K	17,000	17,000				18,000	18,000			
MUL36HPJ132OA	9K+9K+9K	9,000	9,000	9,000			9,000	9,000	9,000		
MUL36HPJ132OA	9K+9K+12K	9,000	9,000	12,000			9,000	9,000	12,000		
MUL36HPJ132OA	9K+9K+18K	8,500	8,500	17,000			9,000	9,000	18,000		
MUL36HPJ132OA	9K+9K+24K	7,286	7,286	19,429			7,714	7,714	20,571		
MUL36HPJ132OA	9K+12K+12K	9,000	12,000	12,000			9,000	12,000	12,000		
MUL36HPJ132OA	9K+12K+18K	7,846	10,462	15,692			8,308	11,077	16,615		
MUL36HPJ132OA	9K+12K+24K	6,800	9,067	18,133			7,200	9,600	19,200		
MUL36HPJ132OA	9K+18K+18K	6,800	13,600	13,600			7,200	14,400	14,400		
MUL36HPJ132OA	9K+18K+24K	6,000	12,000	16,000			6,353	12,706	16,941		
MUL36HPJ132OA	9K+21K+24K	5,667	13,222	15,111			6,000	14,000	16,000		
MUL36HPJ132OA	12K+12K+12K	11,333	11,333	11,333			12,000	12,000	12,000		
MUL36HPJ132OA	12K+12K+18K	9,714	9,714	14,571			10,286	10,286	15,429		
MUL36HPJ132OA	12K+12K+24K	8,500	8,500	17,000			9,000	9,000	18,000		
MUL36HPJ132OA	12K+18K+18K	8,500	12,750	12,750			9,000	13,500	13,500		
MUL36HPJ132OA	12K+18K+24K	7,556	11,333	15,111			8,000	12,000	16,000		
MUL36HPJ132OA	18K+18K+18K	11,333	11,333	11,333			12,000	12,000	12,000		
MUL36HPJ132OA	9K+9K+9K+9K	8,500	8,500	8,500	8,500		9,000	9,000	9,000	9,000	
MUL36HPJ132OA	9K+9K+9K+12K	7,846	7,846	7,846	10,462		8,308	8,308	8,308	11,077	
MUL36HPJ132OA	9K+9K+9K+18K	6,800	6,800	6,800	13,600		7,200	7,200	7,200	14,400	
MUL36HPJ132OA	9K+9K+9K+24K	6,000	6,000	6,000	16,000		6,353	6,353	6,353	16,941	
MUL36HPJ132OA	9K+9K+12K+12K	7,286	7,286	9,714	9,714		7,714	7,714	10,286	10,286	
MUL36HPJ132OA	9K+9K+12K+18K	6,375	6,375	8,500	12,750		6,750	6,750	9,000	13,500	
MUL36HPJ132OA	9K+9K+12K+24K	5,667	5,667	7,556	15,111		6,000	6,000	8,000	16,000	
MUL36HPJ132OA	9K+9K+18K+18K	5,667	5,667	11,333	11,333		6,000	6,000	12,000	12,000	
MUL36HPJ132OA	9K+12K+12K+12K	6,800	9,067	9,067	9,067		7,200	9,600	9,600	9,600	
MUL36HPJ132OA	9K+12K+12K+18K	6,000	8,000	8,000	12,000		6,353	8,471	8,471	12,706	
MUL36HPJ132OA	12K+12K+12K+12K	8,500	8,500	8,500	8,500		9,000	9,000	9,000	9,000	
MUL36HPJ132OA	12K+12K+12K+18K	7,556	7,556	7,556	11,333		8,000	8,000	8,000	12,000	

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance


*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

DIMENSIONS

OUTDOOR UNIT

Unit: inch



MUL36HPJ1320A	
DIMENSIONS	
A	37-1/8
B	40-3/16
C	32-9/16
D	14-17/32
E	16-13/16
F	25
G	15-19/32

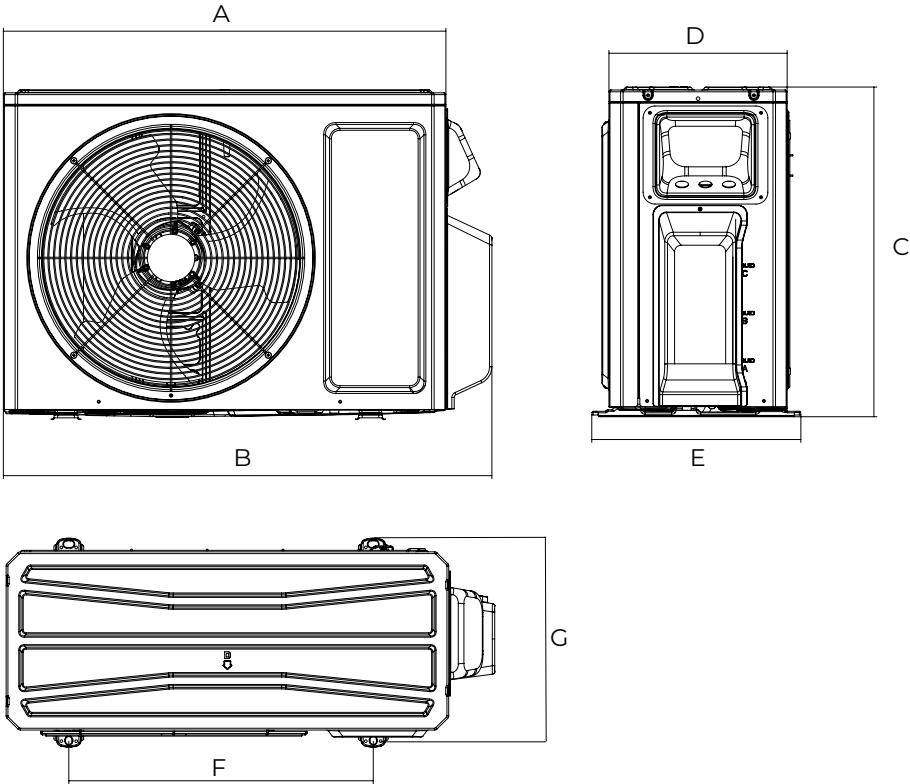

CLEARANCES

OUTDOOR UNIT

Minimum clearance

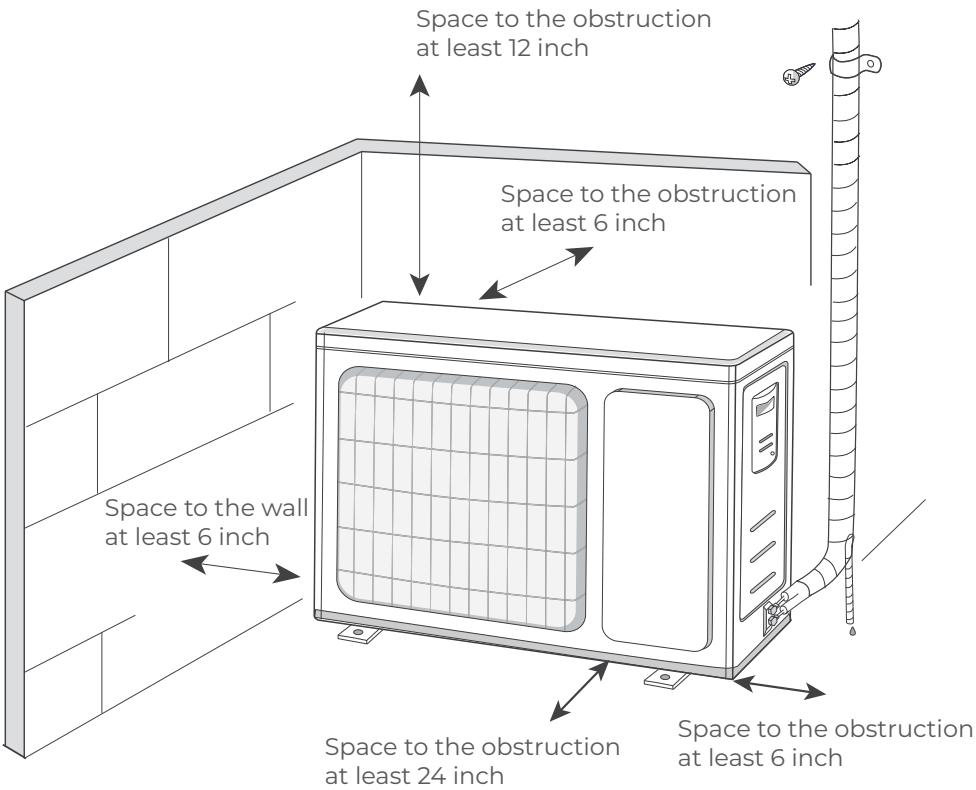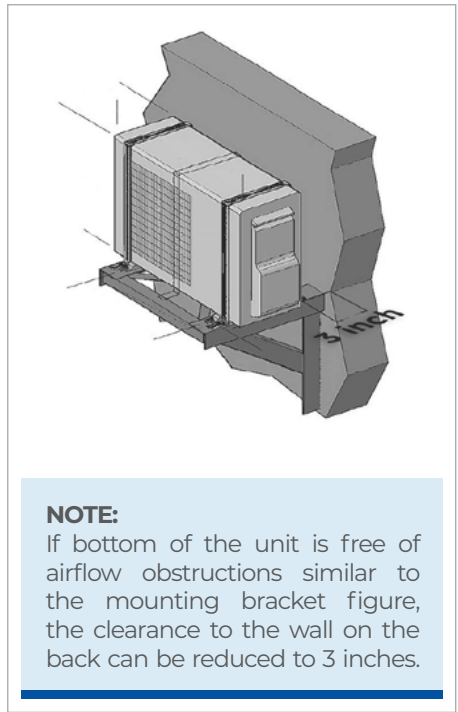

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

BOREALHEATPUMP.COM