

SUBMITTAL DATA

VEN12HPL132IA / VEN12HPL132OA
12000 BTU/H Wall Mounted Heat Pump System

Job Name

Purchaser

Submitted to

Unit Designation


Location

Date

Engineer

For

Schedule No.



VEN12HPL132IA



VEN12HPL132OA



YBE1FB1F



XE71 (Optional)

GENERAL FEATURES

- AHRI Certificate:
- New R32 Refrigerant
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Wireless Remote with LCD Display
- Wired Controller Options
- A2L Sensors are not included
- Wi-Fi Included
- Low Ambient Cooling down to 0°F (Range 0°F to 118°F)
- Low Ambient Heating down to -13°F (Range -13°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY



SYSTEM TYPE		HEAT PUMP		FEATURES & FUNCTIONS SUMMARY	
Outdoor Model		VEN12HPLI320A		Inverter Type	G20
Indoor Model		VEN12HPLI321A		Ultra Low Frequency Torque Control	Yes
SYSTEM PERFORMANCE					
Cooling Capacity	Min - Max	Btu/h	2,730 - 12,700		
	Rated Capacity @95°F	Btu/h	12,000		
Heating Capacity	Min - Max	Btu/h	2,388 - 13,480		
	Rated Capacity @47°F	Btu/h	12,000		
	Rated Capacity @17°F	Btu/h	9,700		
	Rated Capacity @5°F	Btu/h	9,500		
SEER2		16.0		Outdoor Fin Coating (Color:Blue)	Acrylic-Resin/Anti-Corrosive
EER2		8.85		Intelligent Defrosting	Yes
HSPF2		8.5		Force Defrosting	Yes
COP @5°F		1.75		Intelligent Preheating	Yes
Cooling Temperature Range	°F	0 - 118		Low Voltage Startup	Yes
Heating Temperature Range	°F	-13 - 75		Memory/Power Failure Recovery	Yes
Refrigerant Type		R32		Self Diagnosis	Yes
INDOOR UNIT		VEN12HPLI321A		Wired Controller Interface	Yes
Air flow (Min - Max)	CFM	159 - 365		WiFi Included	Yes
Sound Pressure Level (Min - Max)	dB(A)	22 - 42		Indoor Fan Type	Crossflow
Dehumidification	pt/hr	2.96		Multi Fan Speeds	7 Speeds
External Dimensions (W x H x D)	in	32-51/64 x 10-15/64 x 7-9/16		Indoor Unit Display	Yes
Package Dimension (L x W x H)	in	34-23/32 x 13-5/64 x 10-7/16		Auxiliary Electrical Heater	No
Net Weight	lbs	17.6		Ventilation (Outdoor Air)	No
Gross Weight	lbs	20.9		REMOTE CONTROLLER FUNCTIONS	
OUTDOOR UNIT		VEN12HPLI320A		Auto Mode	Yes
Compressor Type		G20 / SINGLE CYLINDER / 1 - STAGE INVERTER		Auto Fan	Yes
Sound Pressure Level	dB(A)	52		Auto Swing (Horizontal Auto Swing)	No
External Dimensions (W x H x D)	in	28-13/16 x 21-27/32 x 12-63/64		Auto Swing (Vertical Auto Swing)	Yes
Package Dimension (L x W x H)	in	31-17/64 x 14-51/64 x 24-7/32		Clock on Remote Controller	Yes
Net Weight	lbs	58.4		Dry Mode	Yes
Gross Weight	lbs	63.9		Dry Anti-Mildew (X-Fan) Mode	Yes
REFRIGERANT PIPING		Energy Saving Mode		Yes	Yes
Refrigerant Charge - R32	oz	21.2		Dirty Filter Alert	No
Additional Charge	oz/ft	0.2		I Feel Function	No
Line Set Size (Liquid - Gas) - Flared Connections	in	1/4 - 3/8		Lock on Remote Controller	Yes
Pre-Charge Length	ft	25		Quiet Mode	Yes
Pipe Length (Min - Max)	ft	10 - 66		Room Temperature Display	Yes
Max. Pipe Elevation	ft	39		Sleep Mode	Yes
ELECTRICAL		115V / 1Ph / 60Hz (Powered by the Outdoor Unit)		Timer Mode	Yes
Power Supply	115V / 1Ph / 60Hz (Powered by the Outdoor Unit)				
Voltage Range (Min - Max)	VAC	103 - 126		Turbo Mode	Yes
Rated Current - Cooling	A	15.22		Display On/Off Control	Yes
Rated Current - Heating	A	14.67		Freeze Guard Mode (46°F)	Yes
MOCP	A	20			
MCA	A	19			
Main Power Wire Size	AWG	Per Local Code			
Interconnecting Wire Size	AWG	14 / 4			

DIMENSIONS

INDOOR UNIT

Unit: inch


VEN12HPL1321A	
DIMENSIONS	
W	32 51/64
H	10 15/64
D	7 9/16

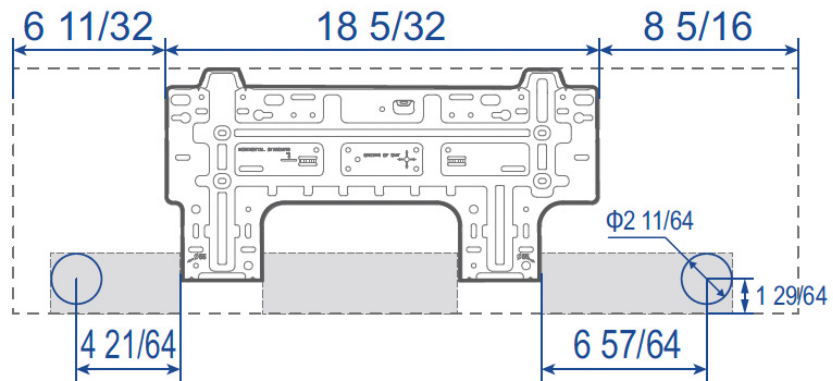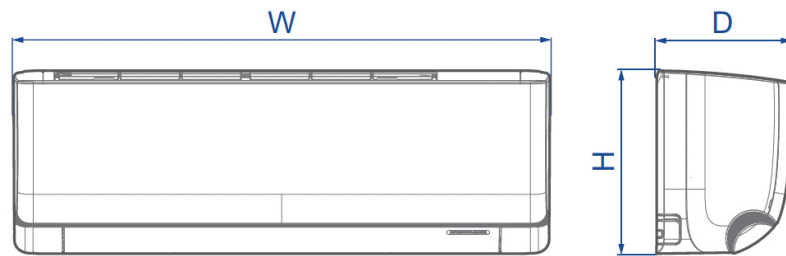

OUTDOOR UNIT


Unit: inch

VEN12HPL1320A	
DIMENSIONS	
A	26 37/64
B	28 13/16
C	2 9/16
D	6 27/64
E	21 27/32
F	17 29/32
G	12 13/64
H	12 63/64

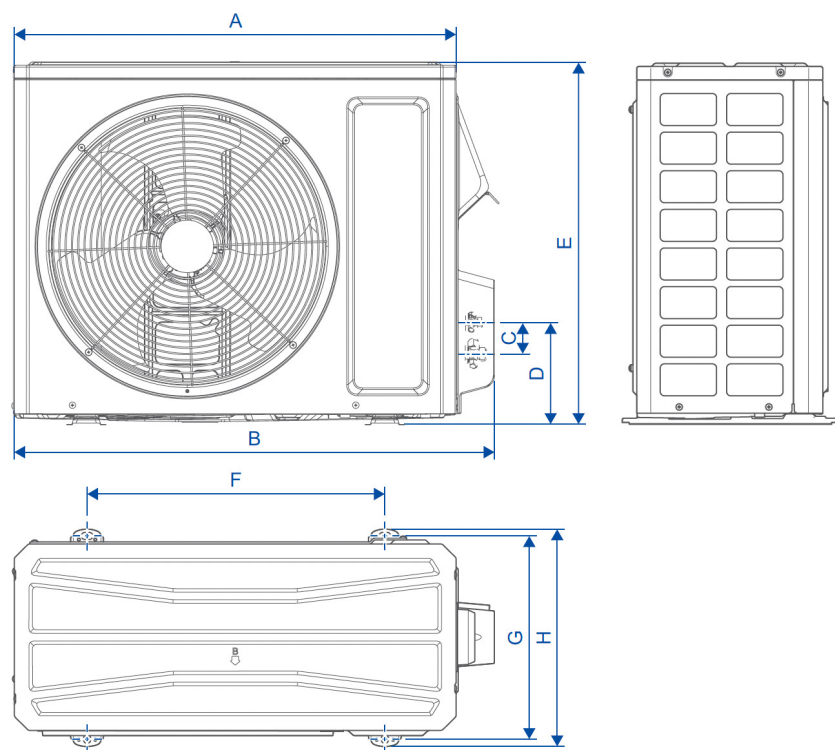

CLEARANCES


INDOOR UNIT Minimum clearance

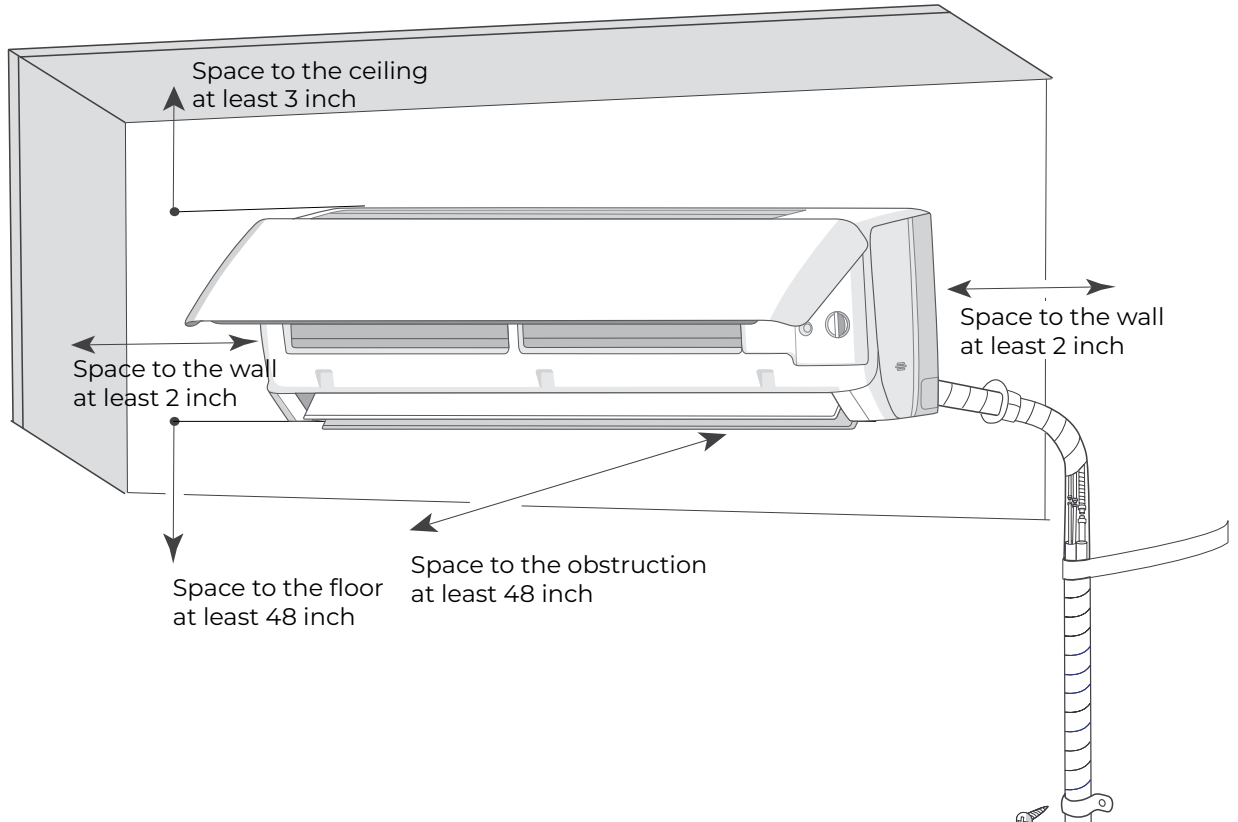

OUTDOOR UNIT Minimum clearance

NOTE:
If bottom of the unit is free of airflow obstructions similar to the mounting bracket figure, the clearance to the wall on the back can be reduced to 3 inches.

This diagram shows a mounting bracket for an outdoor unit. A 3-inch clearance is indicated between the bottom of the bracket and the wall it is mounted to.

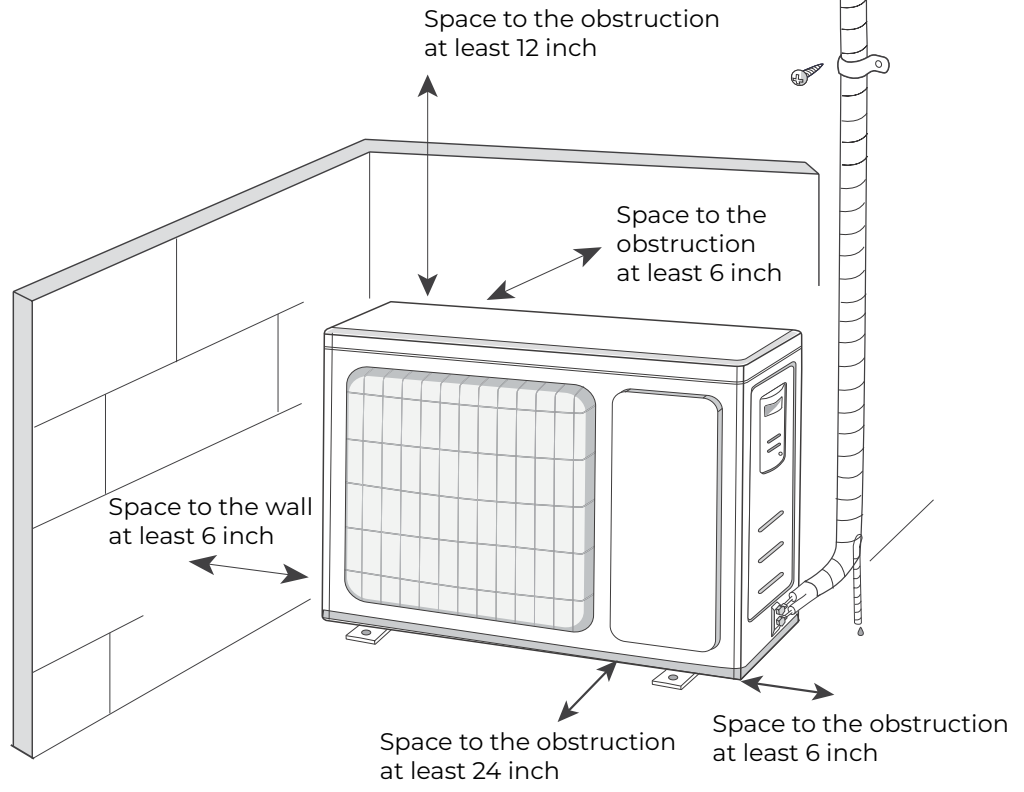

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.